

Traffic Control Phasing – West Bridge

MARKET STREET BRIDGE REHABILITATION


Work Completed

Typical Section

Traffic Accommodations


Phase 1:
Construct
utility bridge then relocate
utilities to bridge

(1.5 to 2 year duration)

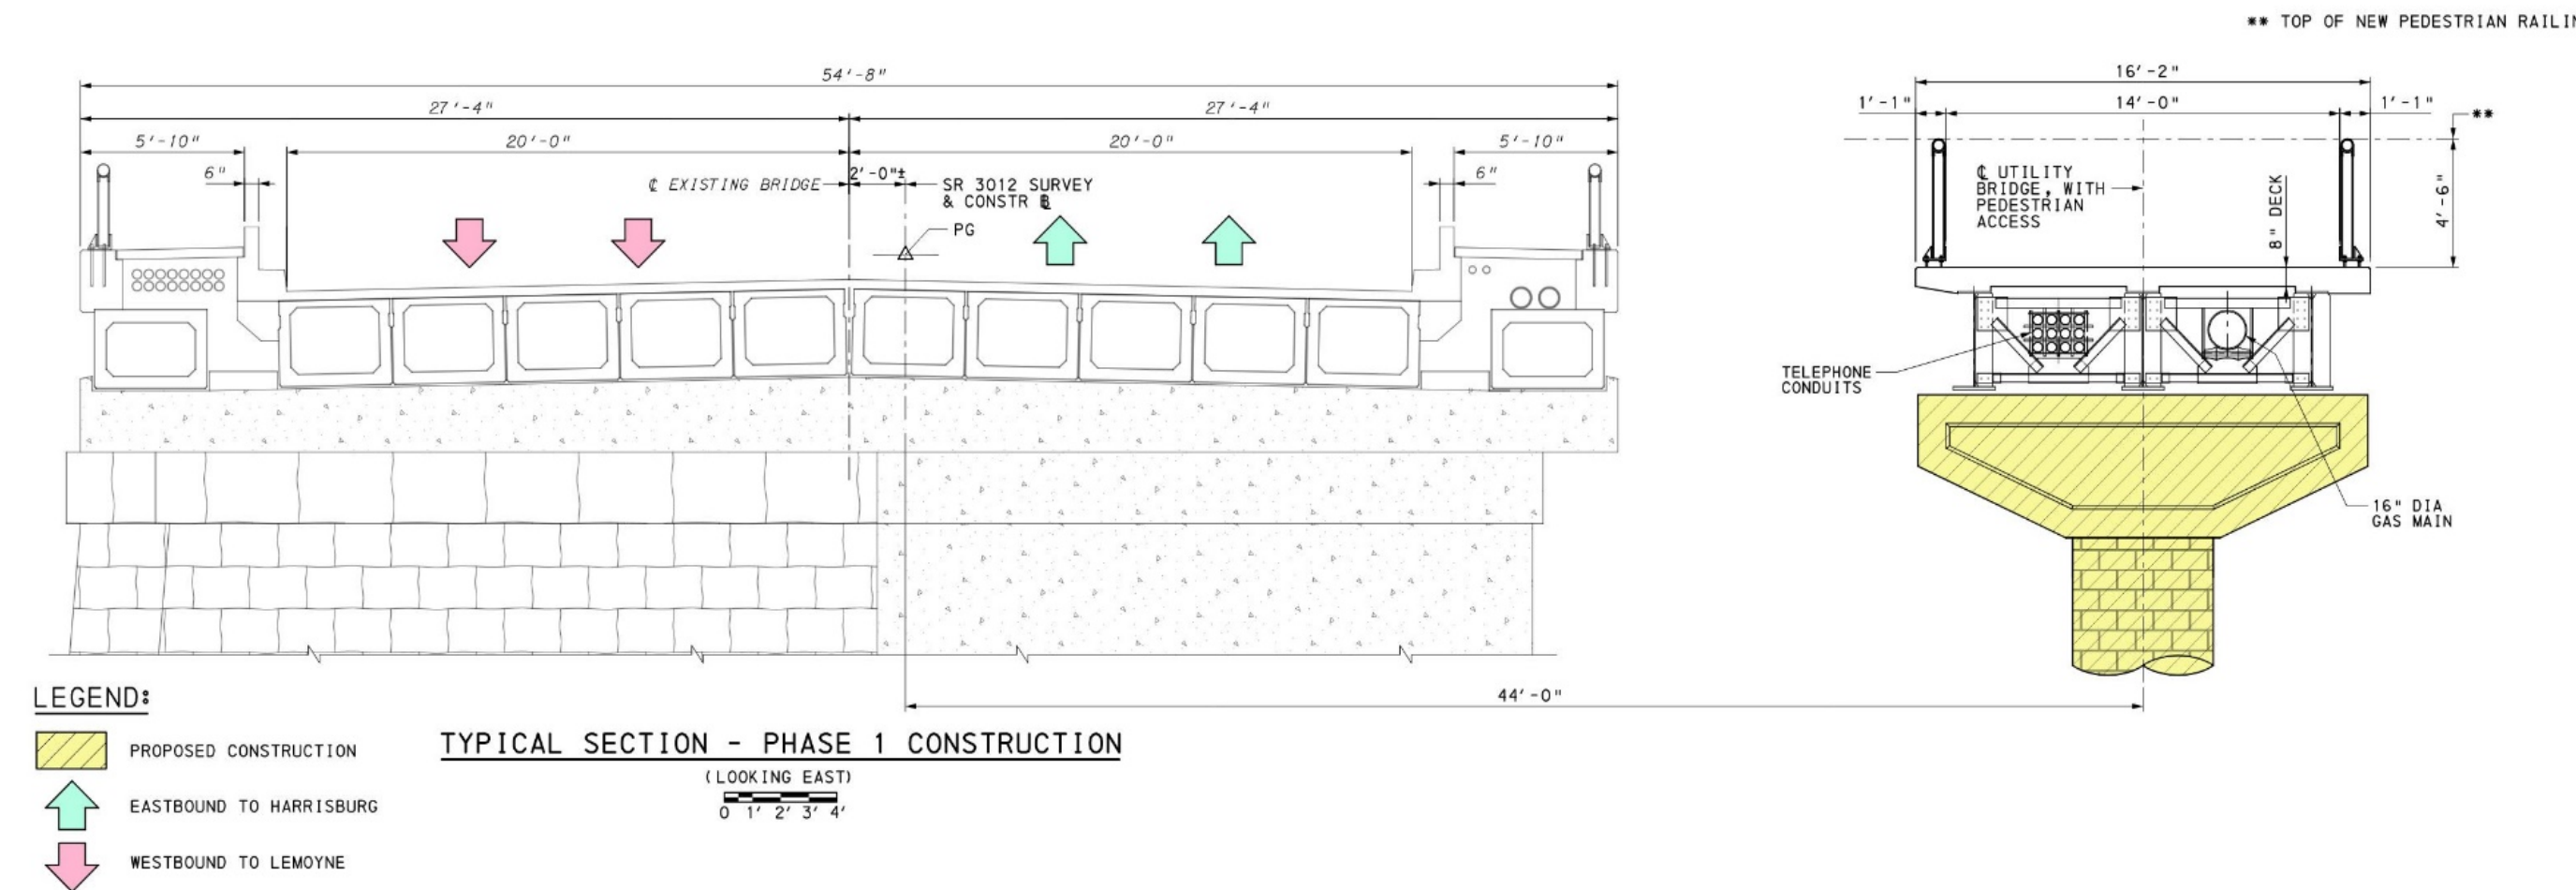


Phase 2:
Construct eastbound to
Harrisburg lanes

(1.5 to 2 year duration)

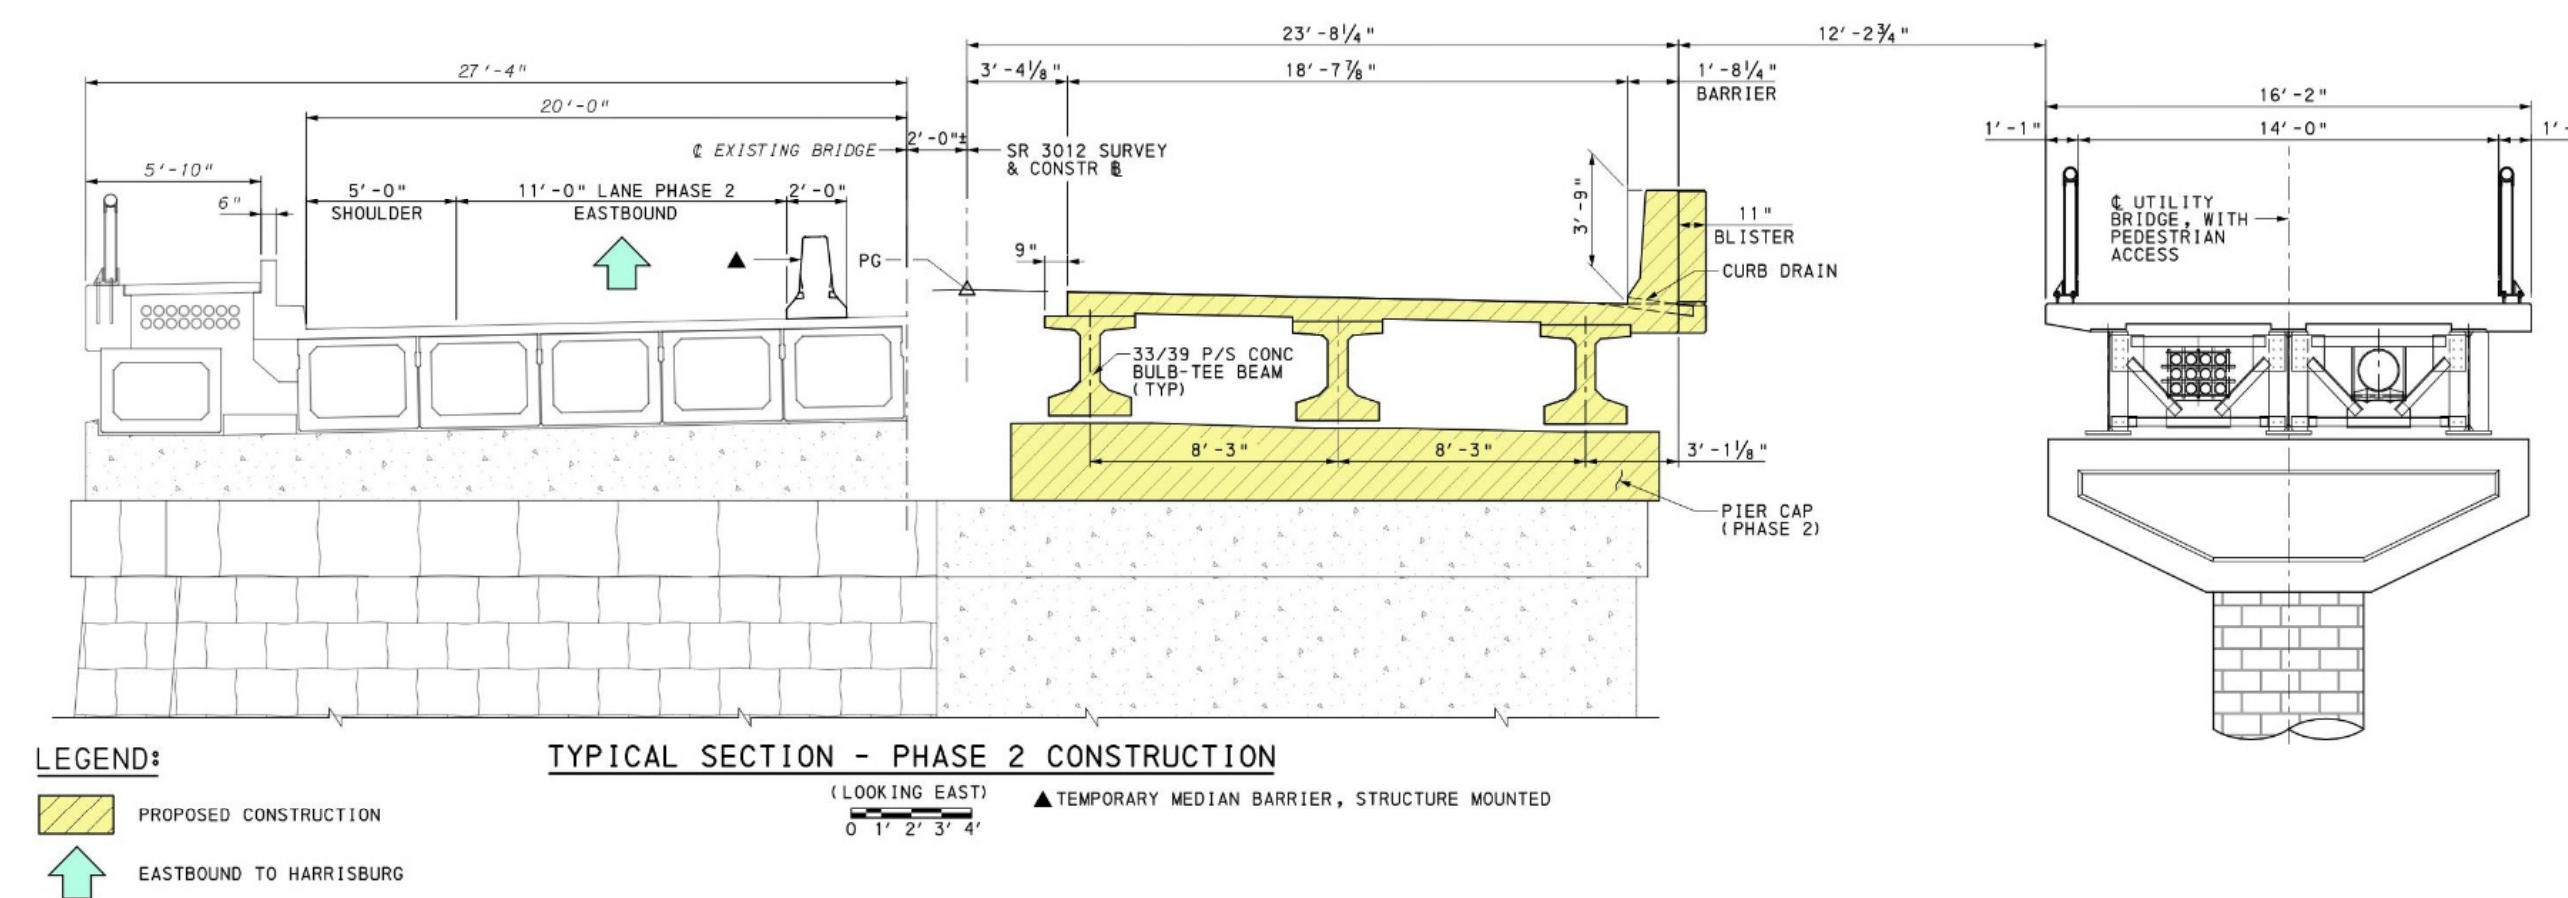

Phase 3:
Construct westbound to
Lemoyne lanes

(1.5 to 2 year duration)

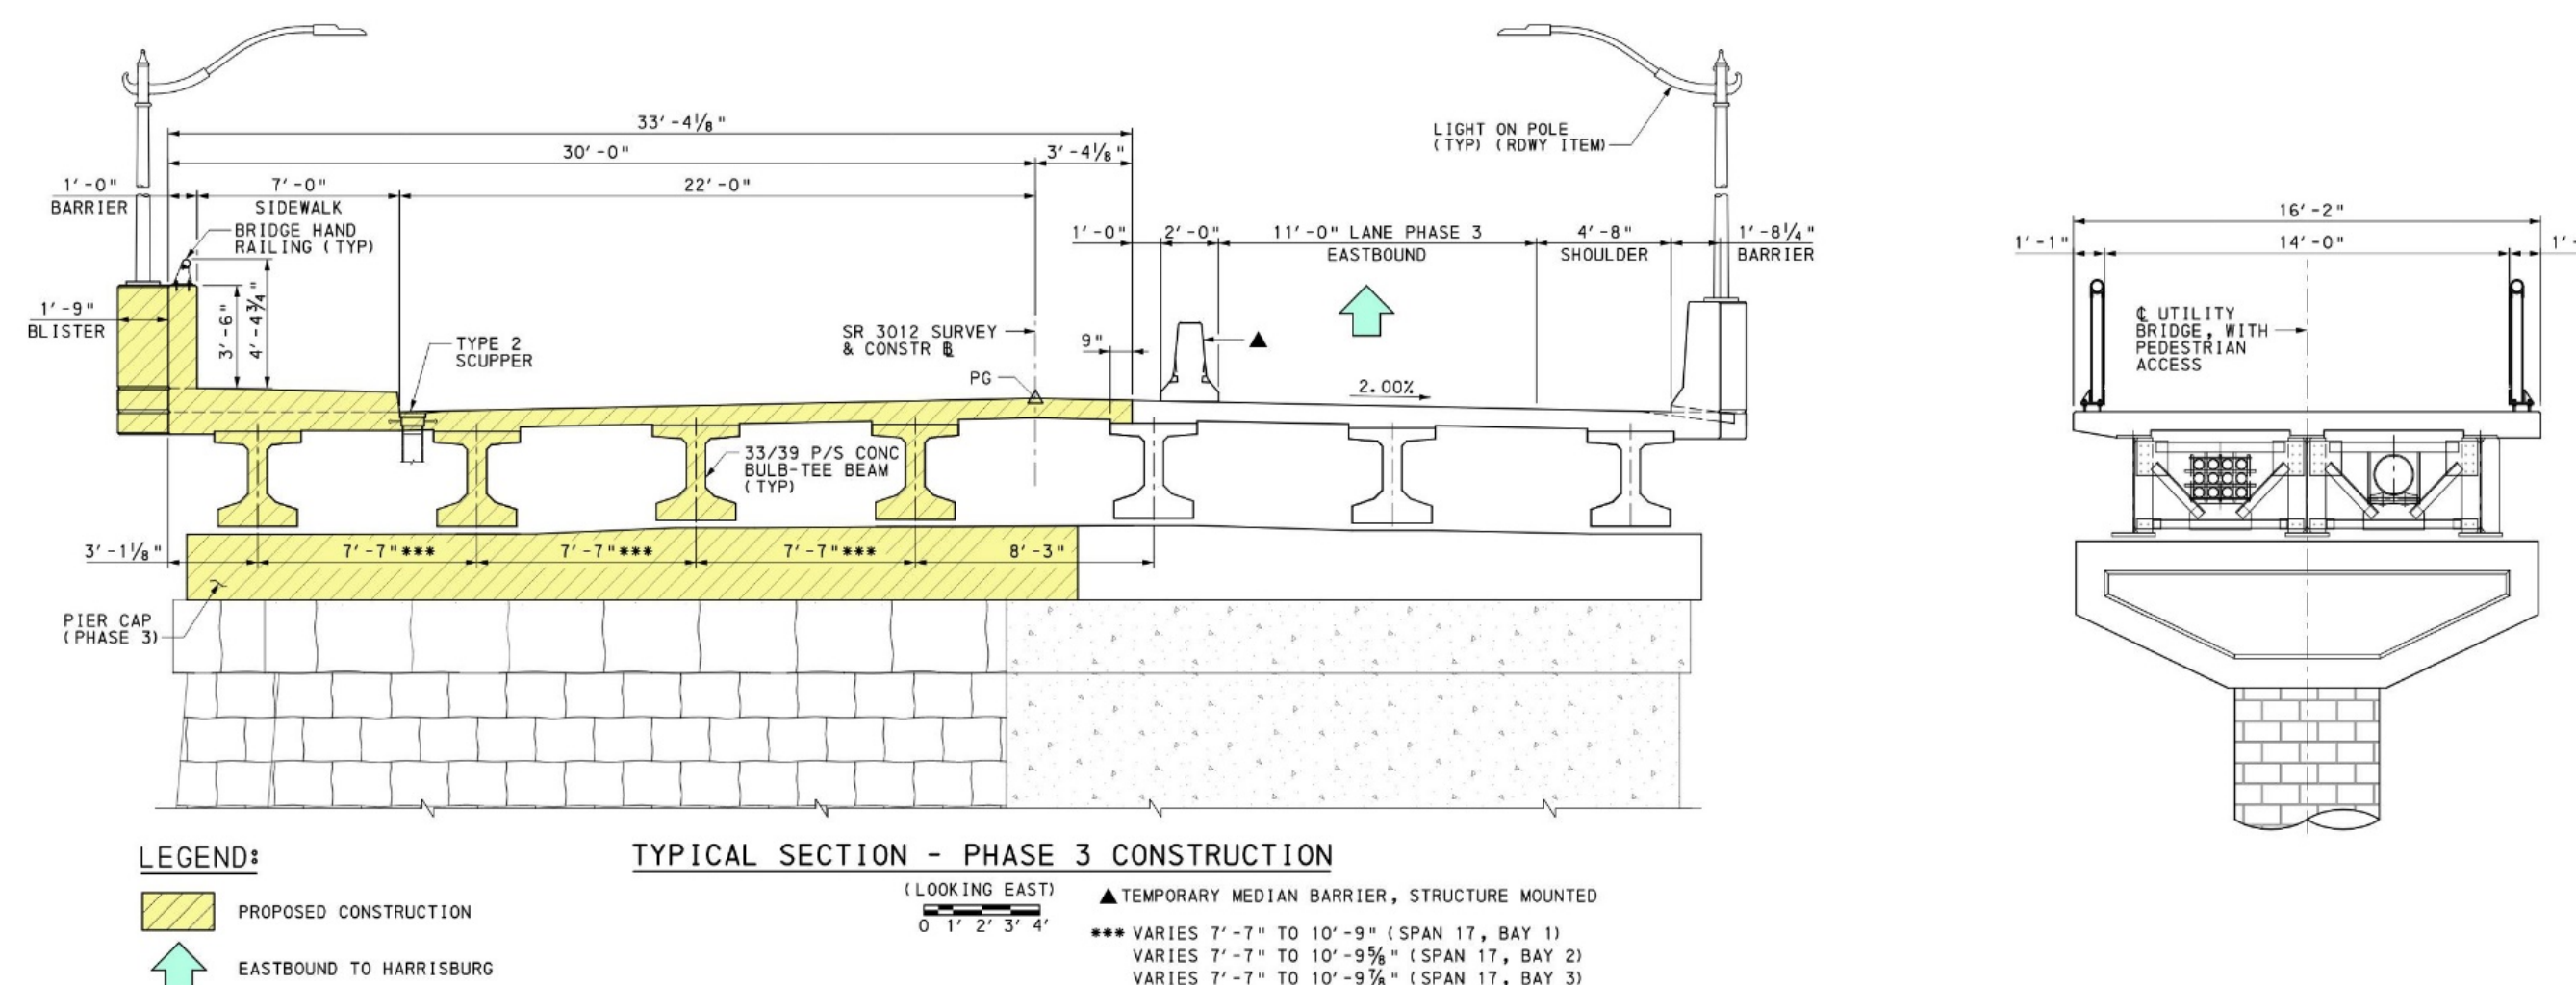

Vehicles: All lanes open to traffic

Pedestrians: Use sidewalk

Bicyclists: Use lanes or sidewalk

Vehicles: 1 Eastbound to Harrisburg lane
 All westbound lanes detoured

Pedestrians: Use utility bridge or upstream sidewalk

Bicyclists: Use utility bridge

Vehicles: 1 Eastbound to Harrisburg lane
 All westbound lanes detoured

Pedestrians: Use utility bridge

Bicyclists: Use utility bridge